

Calcium Bromide Solution

Calcium Bromide Solution 52% is used as a completion and workover fluid to control wellbore pressures in upstream oil & gas operations. It can be used alone or mixed with calcium chloride and/or zinc/calcium bromide to achieve a clear, solids-free fluid over a wide range of densities and crystallization temperatures.

Typical Physical Properties

Properties	Specification
Assay, CaBr ₂ , (w/t,%)	≥52
Appearance	Colorless, clear liquid
Odor	No odor
Chloride (Cl), (w/t,%)	≤0.1
Turbidity, (NTU)	≤6
Sulphate, (w/t,%)	≤0.01
Iron (Fe), ppm	≤5
Total Heavy Metals (Zn, Pb, Hg, As, Cd), ppm	≤5
Density (@20.1°C), g/mL	≥1.7
pH(10% solution)	7.0-8.5
TCT, °C	≤-12.2
Solids retained on 5 Microns filter paper	None

Recommended Handling

All personnel handling this material must handle it as an industrial chemical, wearing protective equipment and observing the precautions as described in the Material Safety Data Sheet (MSDS).




潍坊天福化学科技有限公司
Weifang Tianfu Chemistry Science and Technology Co., Ltd

Packaging and Storage

Packed in 1000 liter IBC tank.

Store in dry, well-ventilated area. Keep container closed. Keep away from heat, sparks and flames. Store away from incompatibles. Follow safe warehousing practices regarding palletizing, banding, shrink-wrapping and /or stacking.

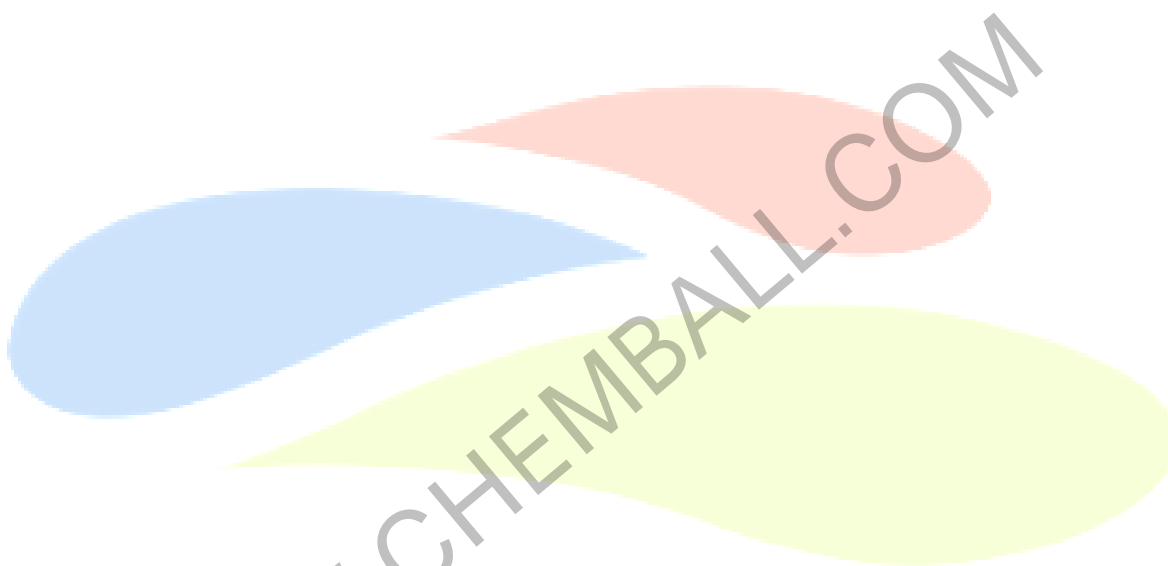

天福化学
TIANFU CHEM