


Technical Data Sheet

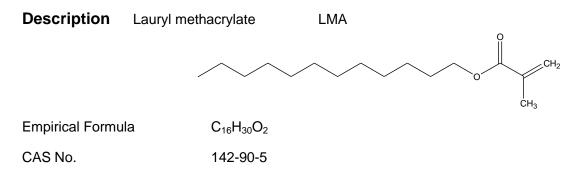

Application

LMA applies for solvent-based acrylic resins, two-component acrylate adhesive, paper finishing agent, leather and textile additives, plastics and oil additives.

Sales Specifications

| Purity (GC) | min.97.0% | |
|---|--------------|--|
| Color (Pt-Co) | max.30 Hazen | |
| Acidity(as MAA) | max.0.10% | |
| Water content (K.Fischer) | max.0.10% | |
| Inhibitor (MEHQ) | 400-800ppm | |
| Note: Inhibitor quantity can be added according to clients' need. | | |

Physical Data

| Appearance | Clear, colorless liquid | Viscosity | No data available |
|------------------|--------------------------------|------------------|-------------------------------|
| Molecular weight | 254.41 g/mol | Boiling point | 142 °C at 5 hPa - lit. |
| Density | 0.868 g/cm ³ (25°C) | Flash point | 107 °C - closed cup |
| Refractive index | n20/D 1.445(lit.) | Water solubility | < 1 µg/l at 25 °C - insoluble |

Packaging

Steel drum, 170kg net weight; or ISOTANK

Storage

Store the products in cool, shady and ventilated conditions. Keep far away from fire.

Transportation

Avoid shine, rain and high temperature in transportation.

Legal notice

This information is furnished to the best of HC Chemical's knowledge or obtained from source believed by HC Chemical to be accurate, and HC Chemical does not assume any legal responsibility for use or reliance upon same. Before using any chemical, read its label and Material Safety Data Sheet.

For more information contact:.

| Tel: +86-512-88800506 | Fax: +86-512-88800503 |
|------------------------|-----------------------|
| E-mail: anff@he-ch.com | www.he-ch.com |